

# CH15 UNDERWATER CHIPPING HAMMER

# STANLEY



The **CH15** is a small and compact hydraulic Chipping Hammer used for light chipping and scaling underwater.



The ergonomic "D" handle and short 17" over all length, makes it easy to use in confined and hard to access locations. The floating trigger design requires minimal pressure across any part of its surface to engage the tool. The trigger is protected within the handle to prevent accidental operation of the tool. The **CH15** has a solid bit retainer and will accept .580 hex shank, oval collar tool bits. Painted hi-visibility yellow.

## SPECIFICATIONS

<b>Steel Capacity</b>	.580 Hex Shank, Oval Collar Tool Bits
<b>Handle Type</b>	"D" Handle, with Inside Trigger
<b>Circuit Type</b>	Open Center
<b>Flow Range</b>	7-9 gpm / 26-34 lpm
<b>Optimum Flow</b>	8 gpm / 30 lpm
<b>Working Pressure</b>	1000-2000 psi / 70-140 bar
<b>Full Relief Setting</b>	2250 psi / 155 bar
<b>Weight (less tool bit)</b>	16 lbs / 7.25 kg
<b>Length</b>	17" / 43 cm
<b>Hydraulic Ports</b>	-6 SAE O-ring
<b>Couplers</b>	Yes
<b>Hose Whips</b>	Yes ( $\frac{3}{8}$ " NPT Male thread)

## FEATURES

- Ergonomic "D" handle with inside trigger
- Stainless Steel spool and fasteners
- Tool body has rubber coating for diver comfort
- Floating trigger design requires minimal pressure
- Uses standard .580 hex shank, oval collar tool bits
- High power to weight ratio
- Operates in any position
- CE Certified

# CH15 UNDERWATER CHIPPING HAMMER

**STANLEY**

## ORDERING INFORMATION

### PART NUMBER

**CH1533101** Chipping Hammer, Underwater, CE, .580 Hex Shank, Oval Collar, Solid Retainer, with couplers


### ACCESSORIES

<b>03971</b>	Flush-Face Coupling Set, 3/8" NPT
<b>03974</b>	Flush-Face Coupling Set, 1/2" NPT
<b>31848</b>	Dual Hose, 50' x 1/2", with couplers
<b>31972</b>	Dual Hose, 25' x 1/2", with couplers
<b>58633</b>	Twinned Hose, 25' x 1/2", with couplers
<b>58634</b>	Twinned Hose, 50' x 1/2", with couplers
<b>66256</b>	Moil Point, 9", .580 Hex Shank, Oval Collar
<b>66257</b>	Narrow Chisel, 9", .580 Hex Shank, Oval Collar

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

### IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit [stanleyhydraulic.com](http://stanleyhydraulic.com) and select the Warranty tab.

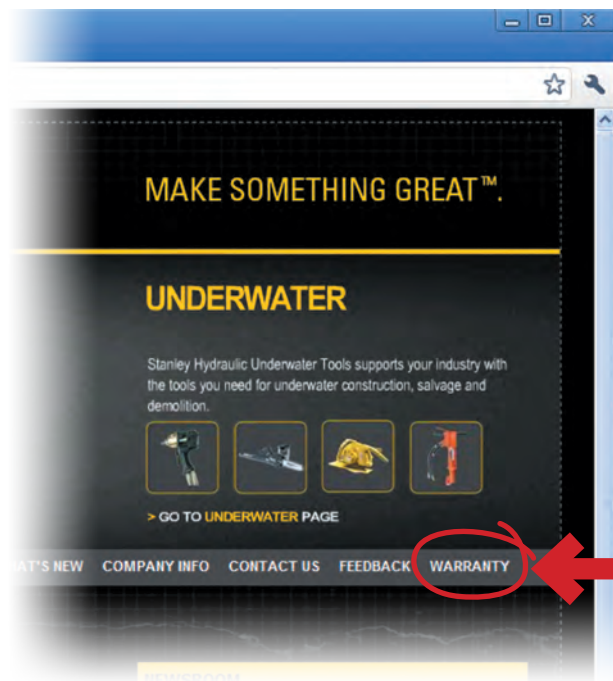

**Note:** The warranty recording form must be submitted to validate the warranty.



Distributor of Stanley:

SCANTEK Sp. z o.o.  
81-581 Gdynia, ul. Nowodworcowa 17  
Tel/fax: +48 58 620 83 60 / 58 620 03 04  
mob. +48 501 734 143 / 507 11 0873  
[www.scantek.pl](http://www.scantek.pl), e-mail: [info@scantek.pl](mailto:info@scantek.pl)

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.