


LW 230 E Compact



The Compact series is ideal for dive centers, ships and boats with limited space. Based on our 280 blocks, these compressors can be equipped individually and used as stationary system. They come fully wired with star/delta start system.

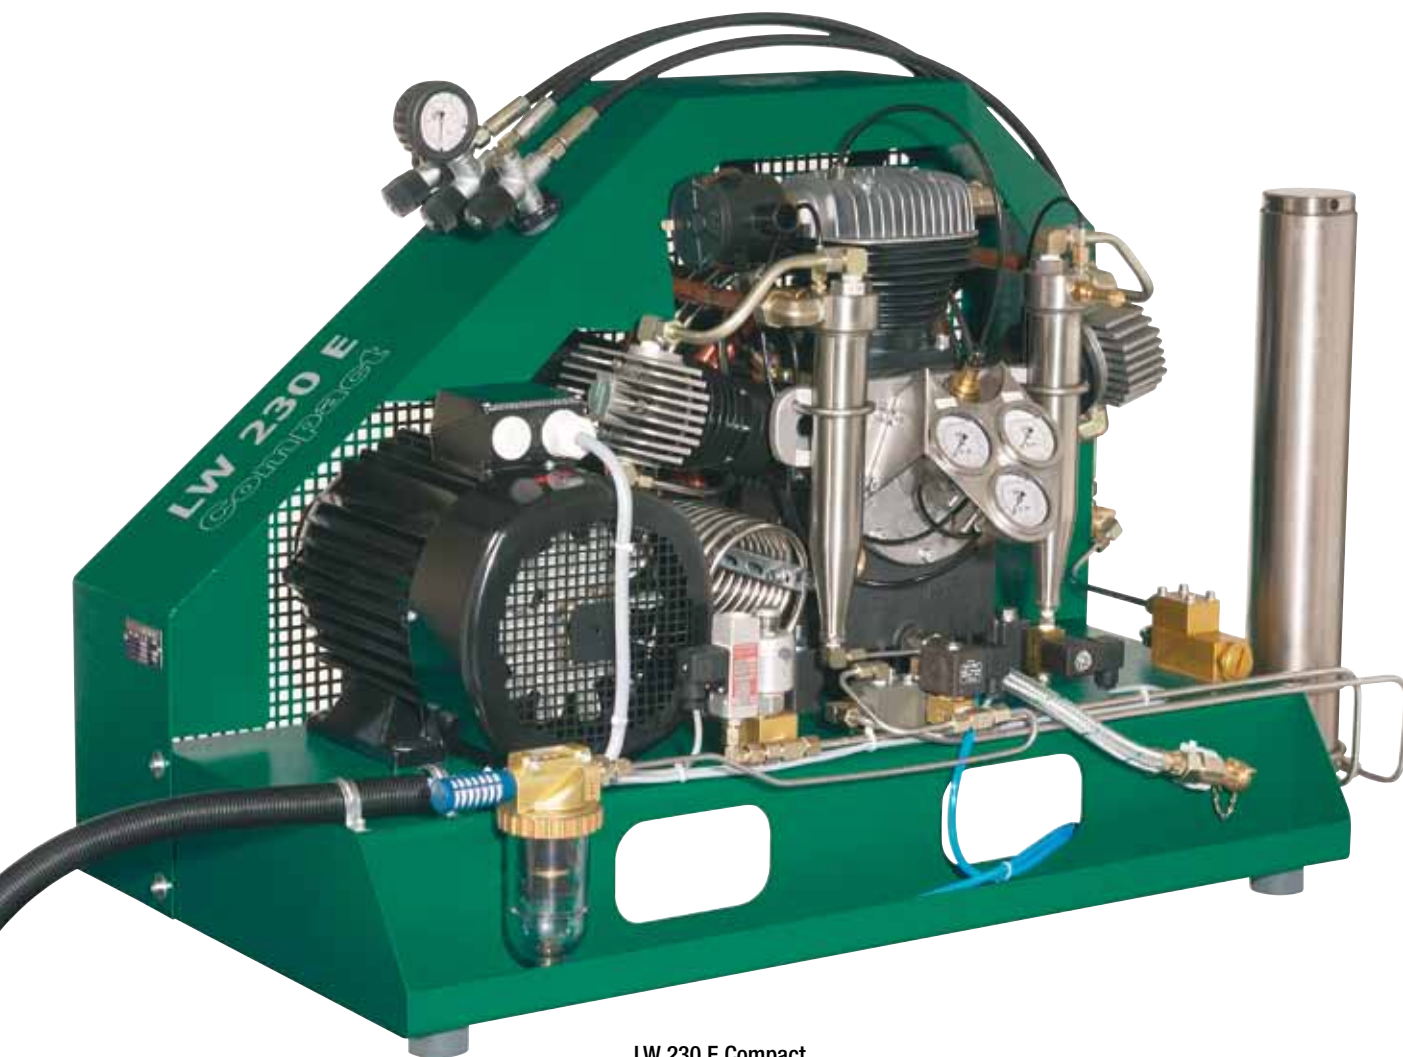

LW 230 E Compact

With options auto drain, auto stop, oil pressure and inter-stage pressure gauges and 2 extra filling hoses.

Official distributor of Lenhardt and Wagner:



SCANTEK Sp. z o.o.
81-581 Gdynia, ul. Nowodworcowa 17
Tel/fax: +48 58 620 83 60 / 58 620 03 04
mob. +48 501 734 143 / 507 11 0873
www.scantek.pl, e-mail: info@scantek.pl

LW 230 E Compact



Specifications

- » Electro motor (E-Motor / 400V / 3 Phase / 50 Hz)
- » Painted steel frame and fan belt guard (RAL 6026)
- » Hour counter
- » Start/ Stop and emergency stop switch
- » Manual condensate drain
- » 1x Filling hose c/w filling valve
- » Pressure maintaining and non return valve
- » All pistons c/w steel piston rings
- » Low pressure oil pump and filter
- » Oil- / Water separators in stainless steel
- » Safety valves after each stage
- » 3x concentric suction/pressure valves
- » Filling pressure to your choice (200 or 300 bar)
- » Connections to your choice
(DIN 200 bar or 300 bar, CGA 200 bar or 300 bar and INT)
- » Breathing air purification an accordance to EN 12021

Options

- » Automatic condensate drain
- » Automatic stop at final pressure
- » Auto start system
- » Motor protection switch
- » 200 and 300 bar parallel filling pressures
- » Oil pressure gauge and intermediate pressure gauges
- » Oil pressure monitoring c/w auto shut down
- » Cylinder head temperature monitoring with auto shut down
- » Puracon filter monitoring (Auto shut down also available)
- » Phase monitoring c/w shut down at wrong direction of rotation
- » Additional high pressure outlet
- » Power cable and plug
- » Special voltages / frequencies on request

Technical Data

LW 230 E Compact	
Type:	Air cooled piston compressor
Capacity [litre/min] / [Nm ³ /h] / [cfm]:	230 / 13.8 / 8.1
Max. Pressure [bar]:	350
RPM [1/min]:	1080
No of cylinders / No of stages:	3 / 3
Prime mover type:	E-Motor / 400V / 3 Phase / 50 Hz
Drive power [kW] / [HP]:	5.5 / 7.5
Cooling air requirement [Nm ³ /h]:	1650
Lubrication type:	Oil pump + Splash oil
Oil capacity [litre]:	1.8
Oil pressure [bar]:	0.6 - 4.0
Operating temperature [°C]:	+5°C to +45°C
Filter capacity [m ³ at +20°C] ¹⁾ :	900 (at +20°C / approx. 72 h)
Dimensions L x W x H [cm]:	120 x 60 x 90
Weight [kg]:	195
Noise level [dB]:	82 (measured at 1 m)

¹⁾ In accordance with EN 12021