


LW 570 E



The LW 570 E is a very slow running compressor with very low maintenance intervals and maintenance costs. It is suitable for continuous operation and comes fully wired with star / delta connection. The 4-stage compressor block is suitable for large, professional applications and allows a max. pressure up to 420 bar (as an option).

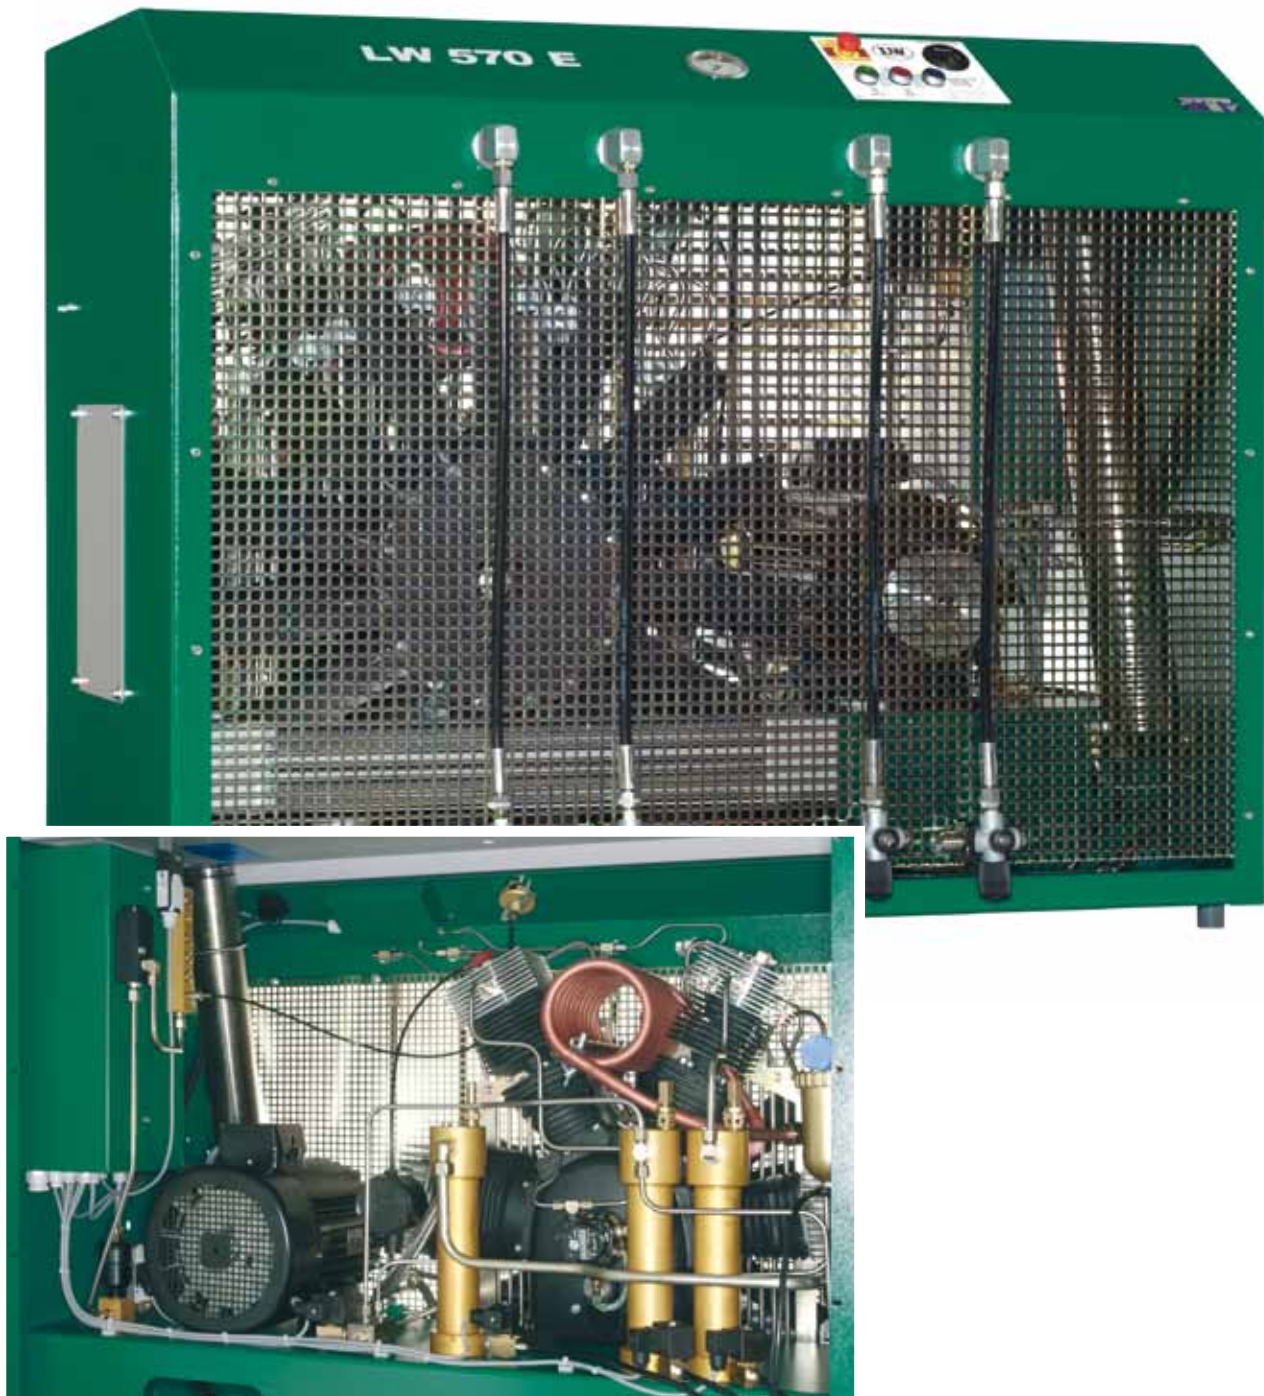

LW 570 E Rear view

LW 570 E



Specifications

- » Electro motor (E-Motor / 400V / 3 Phase / 50 Hz)
- » Painted steel housing (RAL 6026)
- » Automatic condensate drain
- » Automatic stop at final pressure
- » Hour counter
- » Operating panel c/w start/stop and condensate test buttons, as well as emergency stop switch
- » 4x Filling hose c/w filling valve
- » Motor protection switch
- » Safety switch
- » Pressure maintaining and non return valve
- » All pistons c/w steel piston rings
- » Low pressure oil pump and filter
- » Oil- / Water separators in stainless steel
- » Safety valves after each stage
- » 4 concentric suction/pressure valves
- » Filling pressure of your choice (200 or 300 bar)
- » Connections to your choice
(DIN 200 bar or 300 bar, CGA 200 bar or 300 bar and INT)
- » Breathing air purification an accordance to EN 12021

Options

- » Auto start system
- » 200 and 300 bar parallel filling pressures
- » Oil pressure gauge
- » Intermediate pressure gauges
- » Oil pressure monitoring c/w auto shut down
- » Cylinder head temperature monitoring with auto shut down
- » Oil temperature display with auto shut down
- » Puracon filter monitoring (Auto shut down also available)
- » ECC control in remote control box
- » Phase monitoring c/w shut down at wrong direction of rotation
- » Additional high pressure outlet
- » Power cable and plug
- » Block heating device
- » 420 bar Version
- » Special voltages / frequencies on request

Technical Data

LW 570 E	
Type:	Air cooled piston compressor
Capacity [litre/min] / [Nm ³ /h] / [cfm]:	570 / 34.0 / 20.1
Max. Pressure [bar]:	350 / 420
RPM [1/min]:	1100
No of cylinders / No of stages:	4 / 4
Prime mover type:	E-Motor / 400V / 3 Phase / 50 Hz
Drive power [kW] / [HP]:	15.0 / 20.0
Cooling air requirement [Nm ³ /h]:	4500
Lubrication type:	Oil pump + Splash oil
Oil capacity [litre]:	2.5
Oil pressure [bar]:	2.2 (+/- 0.5)
Operating temperature [°C]:	+5°C to +45°C
Filter capacity [m ³ at +20°C] ¹⁾ :	1200 (at +20°C / approx. 35 h)
Dimensions L x W x H [cm]:	130 x 72 x 100
Weight [kg]:	310
Noise level [dB]:	83 (measured at 1 m)

¹⁾ In accordance with EN 12021

Official distributor of Lenhardt and Wagner:



SCANTEK Sp. z o.o.
81-581 Gdynia, ul. Nowodworcowa 17
Tel/fax:+48 58 620 83 60 / 58 620 03 04
mob. +48 501 734 143 / 507 11 0873
www.scantek.pl, e-mail: info@scantek.pl